


HYDRO-CYCLONIC IN-LINE FILTER 1^{1/2}" & 2" **ΥΔΡΟΚΥΚΛΩΝΙΚΟ ΦΙΛΤΡΟ ΓΡΑΜΜΗΣ 1^{1/2}" & 2"**

Filter suitable for filtration of sand and inorganic particles.

1. Construction

Complete glass reinforced polypropylene construction makes the filter durable to time, solar radiation and chemicals. (body PPC, cartridge-disks PPC, screen INOX).

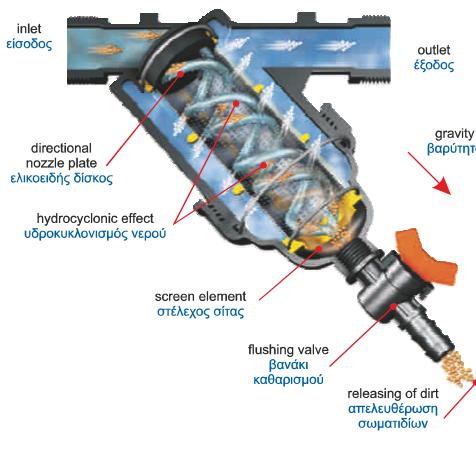

2. Specifications - Χαρακτηριστικά

Working pressure - 8 Atm.(ISO 9912) - Πίεση λειτουργίας

CODE ΚΩΔΙΚΟΣ	Inlet/outlet Εισ./ξε.	Screen surface Επιφ. σίτας cm ²	mesh	micron	Cartridge Colour Χρώμα στελέχους	Discharge Παροχή ¹ m ³ /h
Screen - Σίτα						
3388/0065	1 ^{1/2} "	185	60	250	Grey-Γκρι	8
3388/0085	1 ^{1/2} "	185	80	200	Black-Μαύρο	8
3388/0125	1 ^{1/2} "	185	120	125	Red-Κόκκινο	8
3388/0155	1 ^{1/2} "	185	150	100	Brown-Καφέ	8
3388/0066	2"	274	60	250	Grey-Γκρι	16
3388/0086	2"	274	80	200	Black-Μαύρο	16
3387/0126	2"	274	120	125	Red-Κόκκινο	16
3387/0156	2"	274	150	100	Brown-Καφέ	16

A revolutionary solution for non stop filtration

Incoming dirty water is forced through a directional nozzle plate onto the inside of the stainless steel filter screen. This centrifugal motion and gravity move the debris downward and out the flushing valve. Periodical opening of the flush valve will release the dirt from the debris area without the need to open the filter for cleaning, thus the filter is kept cleaner for a longer period.

The connection is linear.

Can be used as main or secondary filter.

Applications : installation with emitting pipes
trees irrigation with micro-sprinklers
gardening (sprinklers - Pop up)

Equipped with two bases for manometers.

Easy to clean by removing the screen element from the filter housing for rinsing. Cleaning is achieved when pressure differential is close to 0,9 - 1,0 bar.

Η λύση για συνεχή - ασταμάτητο φίλτρο

Καθώς το νερό εισέρχεται στο φίλτρο αναγκάζεται να περάσει μέσα από ένα ελικοειδή δίσκο με αποτέλεσμα την δημιουργία μίας περιστροφικής κίνησης. Η περιστροφική κίνηση και η βαρύτητα, αναγκάζουν τα στερεά σωματίδια να μετακινηθούν προς το κάτω μέρος του φίλτρου. Ανοίγοντας περιοδικά το βανάκι καθαρισμού, απελευθερώνονται τα σωματίδια χωρίς να χρειάζεται να ανοίξουμε το φίλτρο για καθάρισμα επιτρέποντας έτσι το φίλτρο να μείνει καθαρό για περισσότερο χρονικό διάστημα.

Τοποθετείται σε ευθεία σύνδεση.


Μπορεί να χρημοποιηθεί σαν κύριο ή δευτερεύον φίλτρο.

Εφαρμογές : εγκαταστάσεις στάγδην άρδευσης
άρδευση δέντρων με μικροεκτοξευτήρες
κηποτεχνίες (εκτοξευτήρες - Pop up)

Διαθέτει θέσεις για τοποθέτηση μανομέτρων.

Εύκολο στον καθαρισμό του αφαιρώντας το εσωτερικό στοιχείο (στέλεχος σίτας - στέλεχος δίσκων). Ο καθαρισμός πραγματοποιείται όταν η διαφορά πίεσης πλησιάσει το 0,9 - 1,0 bar.

PRESSURE LOSS DIAGRAM - ΔΙΑΓΡΑΜΜΑ ΑΠΩΛΕΙΩΝ ΠΙΕΣΗΣ

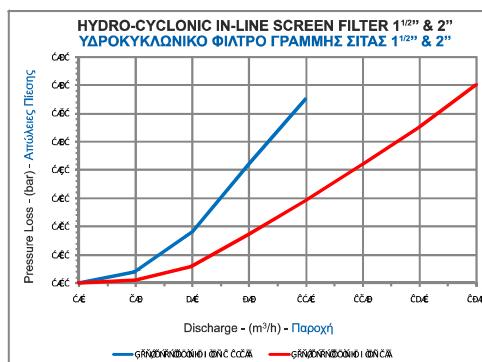

Note : All measurements have been taken in clean water conditions. **Σημείωση :** Όλες οι μετρήσεις έχουν γίνει με καθαρό νερό.